Designed to support cameras weighing from 10 Kg (22 lbs) to 40 Kg (88 lbs) the **CARTONI SIGMA** combines a wide range of counterbalance capabilities with an outstanding fluid damping system.

The frictionless variable fluid modules perform a wide variety of fluid drag allowing smooth and precise movements in any shooting situation.

The patented counterbalance system supports a wide range of payloads at any angle throughout the +/- 90° tilt angle.

All operating knobs and levers are conveniently located and easy to reach with a special care for ergonomics.

The head comes equipped with two telescopic pan bars, illuminated spirit level and digital readouts for drag and counterbalance settings.

In the **35/16MM** Film version the head is supplied with one telescopic pan bar, one front small pan handle and the eye piece extension holder.

accessories

A 930

A 903

A 895

specifications
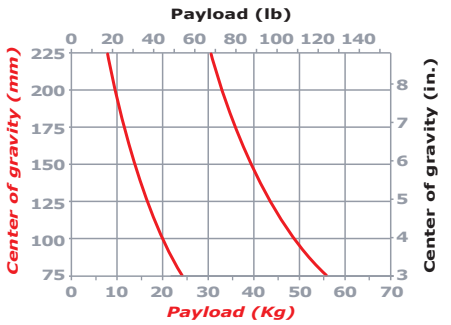
Payload capacity at:	
200 mm (8″)	33 Kg (73 lbs)
150 mm (6″)	40 Kg (88 lbs)
100 mm (4″)	48 Kg (106 lbs)
Weight:	12 Kg (26 lbs)
Pan range:	360°
Tilt range:	+/- 90°
Counterbalance:	Continuous
Fluid drag:	Continuous
Bowl diameter:	Flat Mitchell/150mm
Temp. range:	-40°/+60°C (-40°/+140°F)